

Figure 1. Drill hole location map, G-2 Prospect

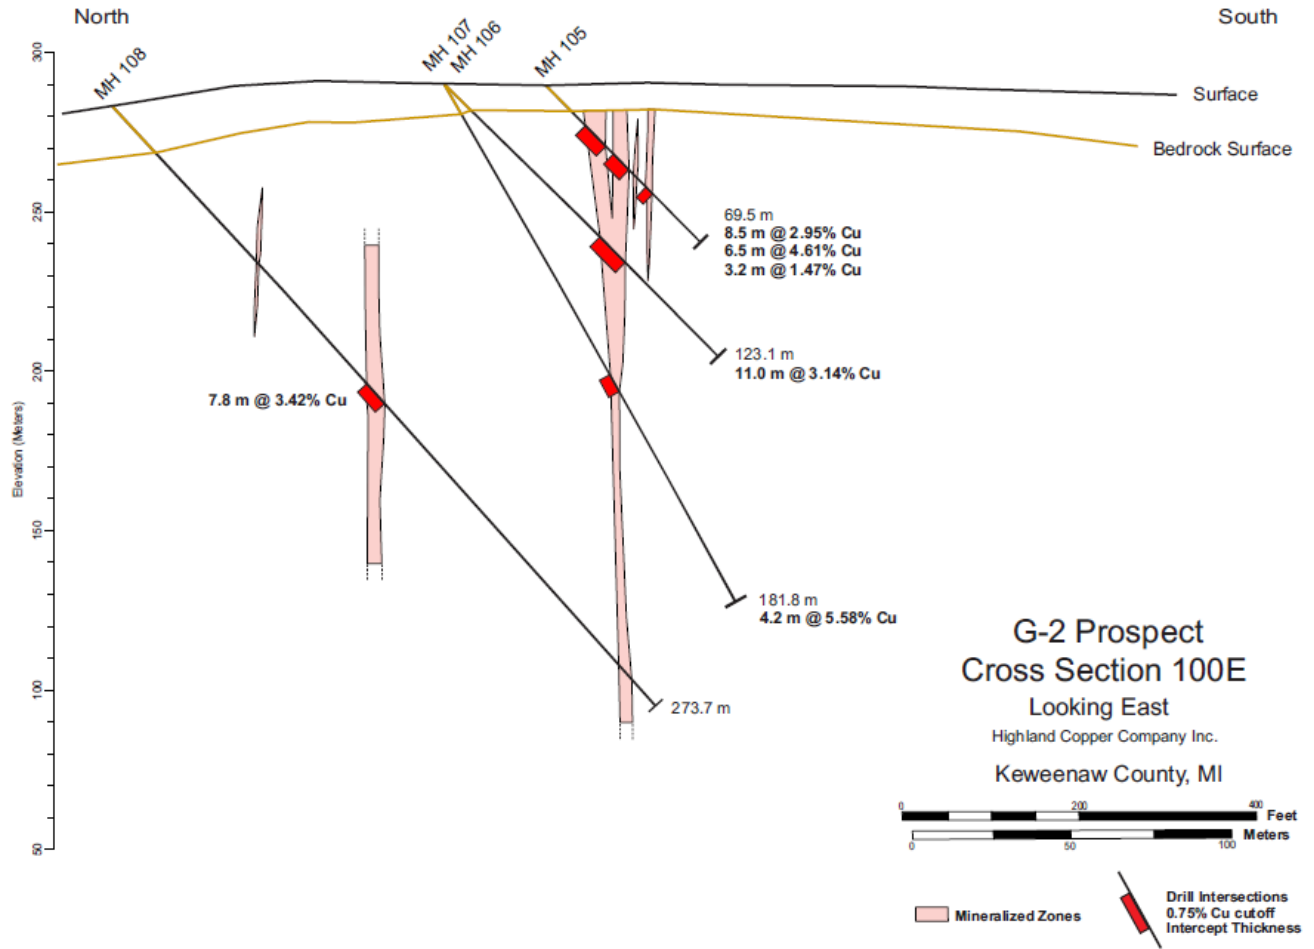


Figure 2. Cross section of the G-2 Prospect

Table 1. Composite drill intersections, G-2 Prospect, Keweenaw Project

G-2 Prospect Composite assay intersections – June 2013						
Hole	Cross Section	Interval (m)	Length (m)	True Width (m)	% Cu (0.75% Cu cut-off)	Ag (g/t)
MH100	No intersections					
MH101	No intersections					
MH102	200E	42.6 – 45.6*	3.0	2.1	0.81	3.4
		47.1 – 50.1*	3.0	2.1	0.98	3.0
MH103	No intersections					
MH104	200E	243.0 – 246.0	3.0	2.1	0.95	3.5
		325.0 – 328.0*	3.0	2.1	0.98	3.7
MH105	100E	18.5 – 27.0	8.5	6.0	2.90	1.6
		30.5 – 37.0	6.5	4.6	4.61	1.7
<i>Including</i>		<i>34.5 – 36.5</i>	<i>2.0</i>	<i>1.4</i>	<i>9.14</i>	<i>3.4</i>
		45.0 – 48.0*	3.0	2.1	2.20	1.9
MH106	100E	69.2 – 80.2	11.0	7.7	3.14	2.9
MH107	100E	105.3 – 111.3	6.0	4.2	5.58	3.7
MH108	100E	119.7 – 127.5	7.8	5.5	3.42	9.5
<i>Including</i>		<i>121.8 – 123.3</i>	<i>1.5</i>	<i>1.1</i>	<i>7.58</i>	<i>17.7</i>
MH109	0E	10.5 – 14.5	4.0	2.8	4.49	4.5
		18.0 – 27.1	9.1	6.4	4.73	12.7
MH110	0E	53.3 – 60.8	7.5	5.3	2.59	17.8
MH111	No intersections					
MH112	100W	40.0 – 45.0	5.0	3.5	3.41	19.4
MH113	No intersections					

Hole	Cross Section	Interval (m)	Length (m)	True Width (m)	% Cu (0.75% Cu cut-off)	Ag (g/t)
MH114	200W	43.3 – 46.3*	3.0	2.1	1.47	6.3
MH115	No intersections					
MH116	500W	6.5 – 9.5*	3.0	2.1	1.70	4.2
		44.0 – 54.5	10.5	7.4	3.08	10.0
		84.0 – 92.5	8.5	6.0	1.65	6.1
		102 – 106.3	4.3	3.0	3.75	8.8
MH117	400W	13.0 – 17.5	4.5	3.2	1.37	3.3
		36.0 – 40.0	4.0	2.8	2.29	4.0
		63.1 – 68.6	5.5	3.9	3.40	4.7
		71.9 – 78.4	6.5	4.6	3.07	6.5
MH118	400W	135.3 – 142.8	7.5	5.3	2.42	6.1
MH119	400W	223.5 – 229.0	5.5	3.9	1.98	2.9
		254.0 – 258.0	4.0	2.8	4.49	13.3
MH120	No intersections					
MH121	No intersections					
MH122	600W	33.9 – 39.1	5.2	3.6	1.92	2.6
		57.7 – 60.7*	3.0	2.1	2.67	3.2
		66.5 – 69.7	3.2	2.2	4.00	14.2
MH123	600W	122.2 – 128.5	6.3	5.1	1.78	2.9
MH124	800W	240.5 – 244.5	4.0	2.8	2.17	3.5
		248.0 – 252.0	4.0	2.8	3.25	5.5
		255.0 – 258.0*	3.0	2.1	1.34	3.5
MH125	800W	110.0 – 113.0*	3.0	2.1	0.94	1.9
		134.0 – 141.5	7.5	5.3	2.40	4.8
		147.0 – 151.0	4.0	2.8	2.09	5.4
MH126	No intersections					

Hole	Cross Section	Interval (m)	Length (m)	True Width (m)	% Cu (0.75% Cu cut-off)	Ag (g/t)
MH127	1000W	131.6 – 136.1	4.5	3.2	1.11	3.5
MH128	No intersections					
MH130	1200W	53.3 – 57.5	4.2	2.9	1.34	2.9
		64.5 – 69.5	5.0	3.5	1.79	2.0
		97.8 – 101.8	4.0	2.8	0.82	0.3
MH131	1200W	145.0 – 148.0*	3.0	2.1	1.59	1.4
MH132	1400W	64.5 – 68.0*	3.5	2.5	1.62	0.7
MH133	1400W	201.0 – 204.0*	3.0	2.1	1.11	5.8
MH134	No intersections					
MH136	1700W	62.9 – 70.5	7.6	5.4	1.17	2.6
		92.0 – 97.0	5.0	3.5	3.23	6.6
		104.0 – 107.0*	3.0	2.1	2.21	6.5
* At least 1.0 m of +0.75% Cu diluted to minimum 3 meters intersection length						