

Alicia Project Drilling Highlights



| Hole Number | Total Depth (m) | Inclination/ Azimuth | From (m) | To (m) | Intersection (m) | True Width (m) | Cu (%) | Au (g/t) | Ag (g/t) | Mo (%) |
|-----------------|-----------------|----------------------|-----------------------|--------|------------------|----------------|--------|----------|----------|--------|
| AL-01* | 300 | -60 / NA | 148 | 152 | 4 | NA | 0.24 | 0.10 | 0.9 | 0.005 |
| including | | | 226 | 228 | 2 | NA | 0.15 | 0.01 | 0.3 | 0.040 |
| AL-02* | 558.6 | -70 / NA | 52 | 152 | 100 | NA | 0.11 | 0.05 | 0.9 | 0.002 |
| including | | | 66 | 76 | 10 | NA | 0.46 | 0.10 | 3.2 | 0.005 |
| and | | | 126 | 134 | 8 | NA | 0.56 | 0.17 | 2.7 | 0.005 |
| AL-03* | 195.1 | -60 / NA | No significant values | | | | | | | |
| ALC10-04 | 83.5 | -45 / 357 | 40.6 | 66.3 | 25.7 | 20.4 | 1.26 | 0.14 | 6.7 | 0.005 |
| including | | | 40.6 | 53.3 | 12.7 | 10.3 | 1.87 | 0.23 | 9.5 | 0.004 |
| including | | | 42.0 | 48.7 | 6.7 | 5.7 | 2.47 | 0.34 | 10.3 | 0.001 |
| including | | | 44.0 | 47.7 | 3.7 | 3.2 | 3.47 | 0.46 | 14.0 | 0.001 |
| and | | | 57.3 | 60.3 | 3.0 | 2.3 | 1.84 | 0.15 | 10.0 | 0.004 |
| ALC10-05 | 88.7 | -65 / 357 | 55.7 | 88.7 | 33.0 | 21.2 | 1.27 | 0.13 | 7.5 | 0.019 |
| including | | | 64.0 | 75.8 | 11.0 | 7.1 | 1.79 | 0.13 | 9.5 | 0.024 |
| including | | | 65.8 | 73.8 | 8.0 | 5.1 | 2.39 | 0.17 | 12.5 | 0.029 |
| including | | | 67.8 | 70.8 | 3.0 | 2.0 | 3.15 | 0.18 | 16.2 | 0.001 |
| and | | | 79.6 | 81.6 | 2.0 | 1.2 | 4.35 | 0.71 | 33.2 | 0.067 |
| and | | | 83.6 | 88.7 | 5.1 | 3.3 | 2.17 | 0.21 | 11.5 | 0.037 |
| ALC10-06 | 101.6 | -60 / 350 | 57.3 | 60.2 | 2.9 | 2.3 | 0.49 | 0.08 | 2.3 | 0.007 |
| | | | 68.6 | 70.7 | 2.1 | 0.9 | 5.42 | 0.79 | 75.3 | 0.062 |
| | | | 75.0 | 91.0 | 16.0 | 11.9 | 0.58 | 0.05 | 4.1 | 0.028 |
| including | | | 76.0 | 79.0 | 3.0 | 1.9 | 1.78 | 0.16 | 14.0 | 0.099 |
| ALC10-07 | 107.3 | -50 / 357 | 62.7 | 66.6 | 4.0 | 2.1 | 0.79 | 0.03 | 1.3 | 0.001 |
| including | | | 63.6 | 64.6 | 1.0 | 0.5 | 2.09 | 0.04 | 1.4 | 0.002 |
| | | | 75.6 | 76.6 | 1.0 | 0.8 | 0.55 | 0.06 | 4.7 | 0.023 |
| | | | 83.6 | 89.0 | 5.4 | 4.1 | 0.37 | 0.03 | 2.6 | 0.010 |
| ALC10-08 | 266.5 | -60 / 0 | 43.0 | 172.5 | 129.5 | 94.3 | 0.33 | 0.04 | 1.8 | 0.003 |
| including | | | 74.0 | 124.5 | 50.5 | 37.2 | 0.64 | 0.08 | 3.2 | 0.002 |
| including | | | 74.0 | 83.6 | 9.6 | 7.8 | 1.76 | 0.21 | 6.6 | 0.003 |
| and | | | 104.5 | 109.0 | 4.5 | 2.9 | 1.16 | 0.16 | 7.0 | 0.004 |
| | | | 115.5 | 118.5 | 3.0 | 1.9 | 0.45 | 0.07 | 3.2 | 0.006 |
| ALC10-09 | 65.5 | -50 / 0 | 18.5 | 20.2 | 1.7 | 1.5 | 0.38 | 0.11 | 7.1 | 0.001 |
| | | | 49.0 | 53.5 | 4.5 | 2.9 | 0.19 | 0.02 | 32.7 | 0.002 |
| ALC10-10 | 95.5 | -50 / 0 | 26.0 | 41.0 | 15.0 | 11.2 | 0.61 | 0.06 | 5.4 | 0.002 |
| including | | | 26.0 | 30.5 | 4.5 | 2.3 | 1.09 | 0.13 | 5.7 | 0.002 |
| and | | | 38.5 | 39.8 | 1.3 | 0.97 | 1.48 | 0.09 | 22.0 | 0.003 |
| | | | 43.4 | 62.7 | 19.3 | 13.7 | 0.32 | 0.04 | 18.9 | 0.006 |
| including | | | 43.4 | 49.0 | 5.6 | 4.0 | 0.55 | 0.11 | 10.5 | 0.012 |
| ALC10-11 | 110.0 | -65 / 0 | 31.4 | 43.5 | 12.2 | 10.7 | 1.32 | 0.14 | 6.4 | 0.007 |
| including | | | 31.4 | 38.4 | 7.0 | 6.2 | 2.15 | 0.22 | 9.8 | 0.012 |
| | | | 46.5 | 56.0 | 9.5 | 8.4 | 0.13 | 0.01 | 4.9 | 0.003 |
| including | | | 46.5 | 50.0 | 3.5 | 3.1 | 0.20 | 0.01 | 3.8 | 0.001 |
| ALC11-12 | 73.2 | -50 / 270 | 55.5 | 72.0 | 16.5 | 11.6 | 0.83 | 0.17 | 4.8 | 0.001 |
| including | | | 57.5 | 70.0 | 12.5 | 8.7 | 1.07 | 0.23 | 6.2 | 0.001 |
| including | | | 59.5 | 65.1 | 5.6 | 4.4 | 1.80 | 0.46 | 10.5 | 0.001 |
| ALC11-13 | 71.1 | -45 / 350 | 15.4 | 27.6 | 12.3 | 8.2 | 0.62 | 0.03 | 1.6 | 0.007 |
| including | | | 21.8 | 27.6 | 5.8 | 3.9 | 0.80 | 0.03 | 1.8 | 0.009 |
| including | | | 23.8 | 27.6 | 3.8 | 2.5 | 1.02 | 0.03 | 3.5 | 0.008 |
| ALC11-14 | 54.3 | -70 / 350 | 22.0 | 41.5 | 19.5 | 13.8 | 0.60 | 0.06 | 2.3 | 0.021 |
| including | | | 36.0 | 38.3 | 2.3 | 1.6 | 1.67 | 0.10 | 5.0 | 0.018 |
| and | | | 23.1 | 31.0 | 7.9 | 5.6 | 0.73 | 0.08 | 3.4 | 0.029 |
| ALC11-15 | 74.7 | -40 / 180 | 13.7 | 15.9 | 2.2 | 1.5 | 0.81 | 0.08 | 3.7 | 0.001 |
| and | | | 22.3 | 32.4 | 10.1 | 6.7 | 0.36 | 0.04 | 2.0 | 0.007 |
| ALC11-16 | 153.6 | -60 / 180 | 13.0 | 145.0 | 134.0 | NA | 0.29 | 0.03 | 1.8 | 0.004 |
| including | | | 46.3 | 56.0 | 9.8 | 6.0 | 1.27 | 0.07 | 3.8 | 0.032 |
| and | | | 127.5 | 132.5 | 5.0 | 3.3 | 2.42 | 0.36 | 19.9 | <0.001 |
| ALC11-17 | 335.0 | -60 / 270 | 13.0 | 211.5 | 198.5 | NA | 0.16 | 0.02 | 1.7 | 0.002 |
| including | | | 50.0 | 65.5 | 15.5 | 9.3 | 0.13 | 0.02 | 3.5 | 0.001 |
| and | | | 18.5 | 37.0 | 18.5 | 11.1 | 1.20 | 0.15 | 13.3 | 0.012 |
| including | | | 26.7 | 33.5 | 6.8 | 4.1 | 2.16 | 0.24 | 29.7 | 0.012 |
| ALC11-18 | 278.4 | -90 / 0 | 216.4 | 224.5 | 8.2 | 5.2 | 0.47 | 0.11 | 4.1 | 0.098 |
| including | | | 221.4 | 223.5 | 2.2 | 1.4 | 0.80 | 0.17 | 6.3 | 0.207 |

*2003 drilling by previous owner

Contact

Jim Borland

President and Director

jboland@straitgold.com

Head Office

18 King Street E., Suite 1203
Toronto, Ontario, Canada
M5C 1C4

Phone +1-416-223-9970

Fax +1-416-223-4073

Peru Office


Minera Strait Gold Peru S.A.C.
Monte Umbroso 320, Dpto. 101
Chacarilla, Surco, Lima 33, Peru

Phone +55-1-996-790-135


carteaga@straitgold.com

Dr. Roger Moss, P.Geo.,
is the Qualified Person
for the purpose of this
summary sheet

IP Chargeability Anomalies

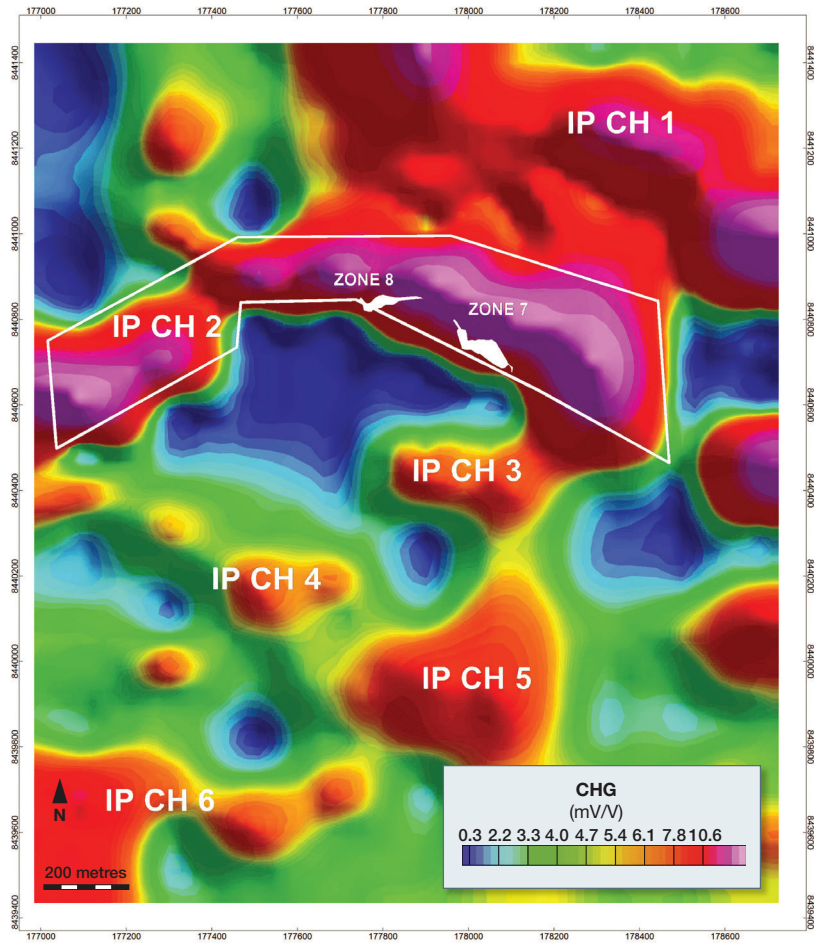

Magnetic Anomalies

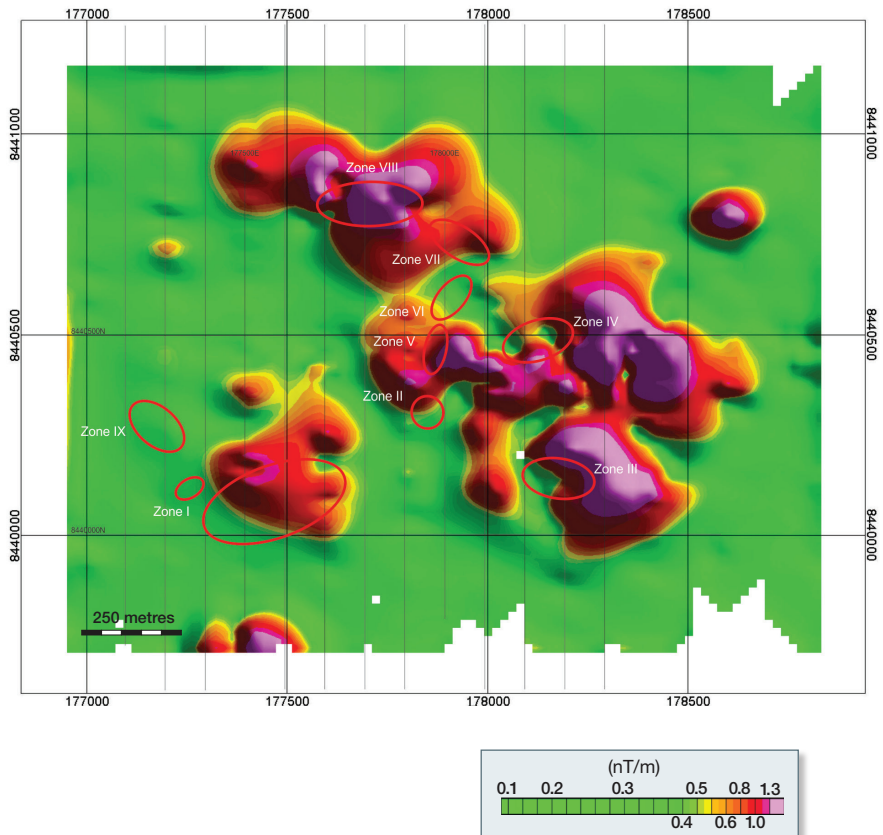

Contact

Jim Borland

President and Director

jborland@straitgold.com

Head Office

18 King Street E., Suite 1203
Toronto, Ontario, Canada M5C 1C4

Phone +1-416-223-9970

Fax +1-416-223-4073

Peru Office

Minera Strait Gold Peru S.A.C.
Monte Umbroso 320, Dpto. 101
Chacarilla, Surco, Lima 33, Peru

Phone: +55-1-996-790-135

carteaga@straitgold.com

*Dr. Roger Moss, P.Geo.,
is the Qualified Person
for the purpose of this
summary sheet*