

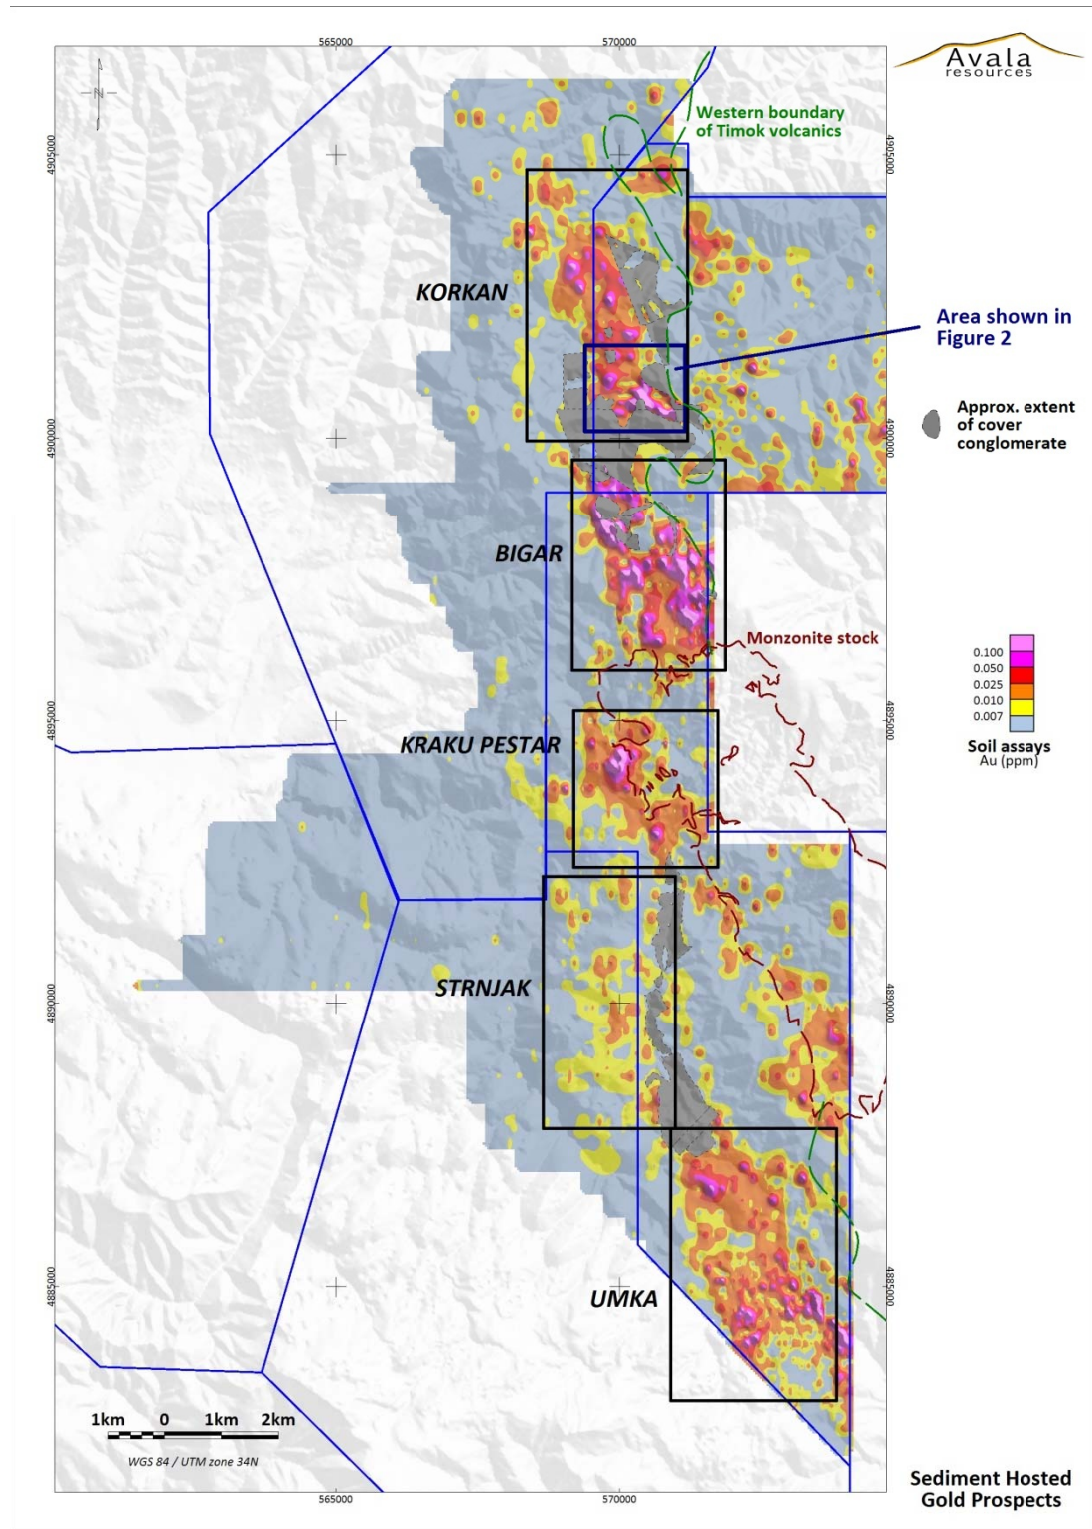


Figure 1: The sediment hosted gold belt showing key geological features and priority target areas as defined by gold in soil anomalies, trenches or diamond drilling.

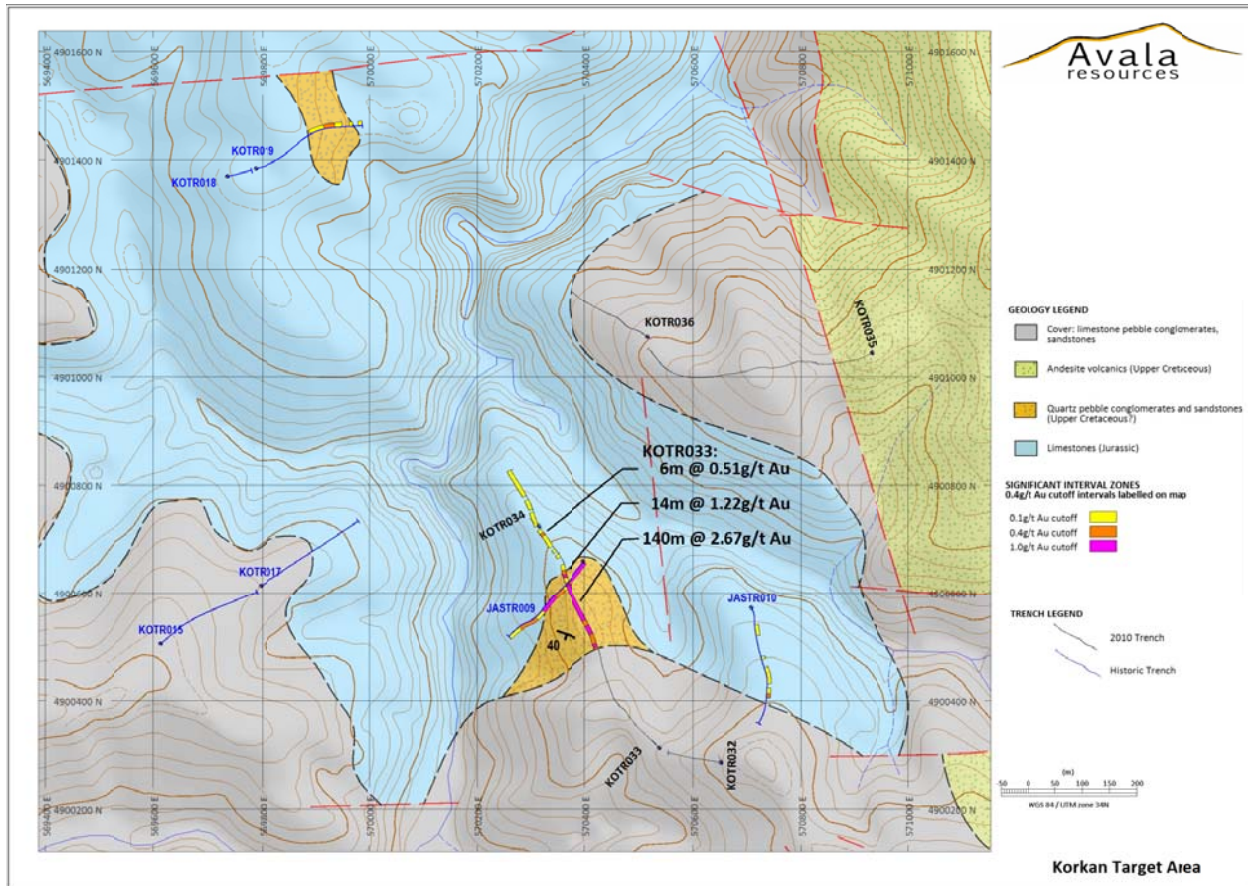


Figure 2: Korkan target area showing geology and trench locations

Table 1: All Korkan gold trench intercepts at various cut-off grades.

TRENCH SIGNIFICANT INTERVALS								
Korkan								
1g/t Au cut-off, 3m minimum length, 3m maximum internal dilution								
Trench ID	From (ft)	To (ft)	Interval (ft)	Au (Oz/t)	From (m)	To (m)	Interval (m)	Au (g/t)
JASTR009	0.0	147.6	147.6	0.097	0	45	45	3.02
JASTR009	164.0	180.4	16.4	0.058	50	55	5	1.80
JASTR009	282.2	403.5	121.4	0.125	86	123	37	3.88
KOTR033	748.0	767.7	19.7	0.044	228	234	6	1.38

KOTR033	833.3	892.4	59.1	0.038	254	272	18	1.19
KOTR033	931.8	1174.5	242.8	0.137	284	358	74	4.27
KOTR033	1220.5	1240.2	19.7	0.068	372	378	6	2.10
0.4g/t Au cut-off, 5m minimum length, 5m maximum internal dilution								
Trench ID	From (ft)	To (ft)	Interval (ft)	Au (Oz/t)	From (m)	To (m)	Interval (m)	Au (g/t)
JASTR009	0.0	193.6	193.6	0.080	0	59	59	2.50
JASTR009	213.3	403.5	190.3	0.084	65	123	58	2.61
JASTR009	465.9	584.0	118.1	0.015	142	178	36	0.45
JASTR010	538.1	557.7	19.7	0.019	164	170	6	0.59
KOTR001	98.4	131.2	32.8	0.016	30	40	10	0.49
KOTR019	498.7	564.3	65.6	0.016	152	172	20	0.51
KOTR033	734.9	1194.2	459.3	0.086	224	364	140	2.67
KOTR033	1220.5	1266.4	45.9	0.039	372	386	14	1.22
KOTR033	1522.3	1542.0	19.7	0.016	464	470	6	0.51
0.1g/t Au cut-off, 5m minimum length, 5m maximum internal dilution								
Trench ID	From (ft)	To (ft)	Interval (ft)	Au (Oz/t)	From (m)	To (m)	Interval (m)	Au (g/t)
JASTR009	0.0	672.6	672.6	0.051	0	205	205	1.60
JASTR010	108.3	177.2	68.9	0.004	33	54	21	0.13
JASTR010	308.4	324.8	16.4	0.003	94	99	5	0.11
JASTR010	377.3	479.0	101.7	0.004	115	146	31	0.14
JASTR010	502.0	564.3	62.3	0.010	153	172	19	0.30
KOTR001	85.3	150.9	65.6	0.011	26	46	20	0.35
KOTR003	98.4	131.2	32.8	0.006	30	40	10	0.18
KOTR019	406.8	610.2	203.4	0.010	124	186	62	0.33
KOTR019	656.2	675.9	19.7	0.004	200	206	6	0.13



KOTR019	708.7	734.9	26.2	0.004	216	224	8	0.14
KOTR033	734.9	1305.8	570.9	0.073	224	398	174	2.27
KOTR033	1351.7	1378.0	26.2	0.007	412	420	8	0.23
KOTR033	1397.6	1417.3	19.7	0.005	426	432	6	0.15
KOTR033	1437.0	1568.2	131.2	0.009	438	478	40	0.29
KOTR034	6.6	91.9	85.3	0.009	2	28	26	0.28
KOTR034	111.5	177.2	65.6	0.005	34	54	20	0.16
KOTR034	203.4	387.1	183.7	0.005	62	118	56	0.14

- Intervals not in bold represent previously released data.
- Trench samples are generally taken on a 2m basis and weigh ~6kg (1m basis weigh ~3kg).
- Assay method: Fire assay Au (50g).
- Intercept widths do not necessarily represent true width.
- No top cut applied.